



HD-SCRAPER





HD-SCRAPER

When you demand more

Already legendary FMG scraper is a popular work equipment for removing ice and for levelling roads. The new HD-Scraper from FMG completes the scraper collection for tractors over 200hp/10000kg, for hard use.

FMG HD-Scraper is designed to respond for the durability and more flexible operating features required by more powerful and heavier tractors. HD-Scraper has the same features as basic scraper, but it also has something new as hydraulic extension wings as an option. Everything is designed so that tractor's loads on the structures of the scraper has considered and the whole scraper is even more robust.

The new FMG HD-Scraper is equipped with removable hydraulic pressure cylinder that makes the coupling of the HD-Scraper easier. The 3m wide basic blade already enables a lot, but the optional hydraulic extensions give you additional working width and new possibilities for work. As standard equipment you get the revolving, (290mm wide) support wheels, stinger blade, pressure release sockets for hoses with collector, toolbox with reserve pins and tools for changing stinger studs, and accumulators. As an option, it is possible to get the hydraulically operated support wheels.



WHY HD-SCRAPER?

- robust construction for big tractors
- wide revolving support wheels
- new removable hydraulic pressure cylinder
- hydraulic extensions as option
- several blade options
- toolbox with spare pins and tools for changing stinger studs
- pressure release sockets (with collector) for hoses storage
- 2 years warranty



Turning angle + - 27 degrees

Due to the large turning angle to both side, HD-scraper enables to use for road maintenance in summer and winter.



More working width with hydraulically operated extensions (option)

You can easily and quickly change the working width from 3 m to 3,9 m.






Hydraulically operated support wheels (option)

By adjusting the hight of the support wheel, the working height can be adjusted accurately.



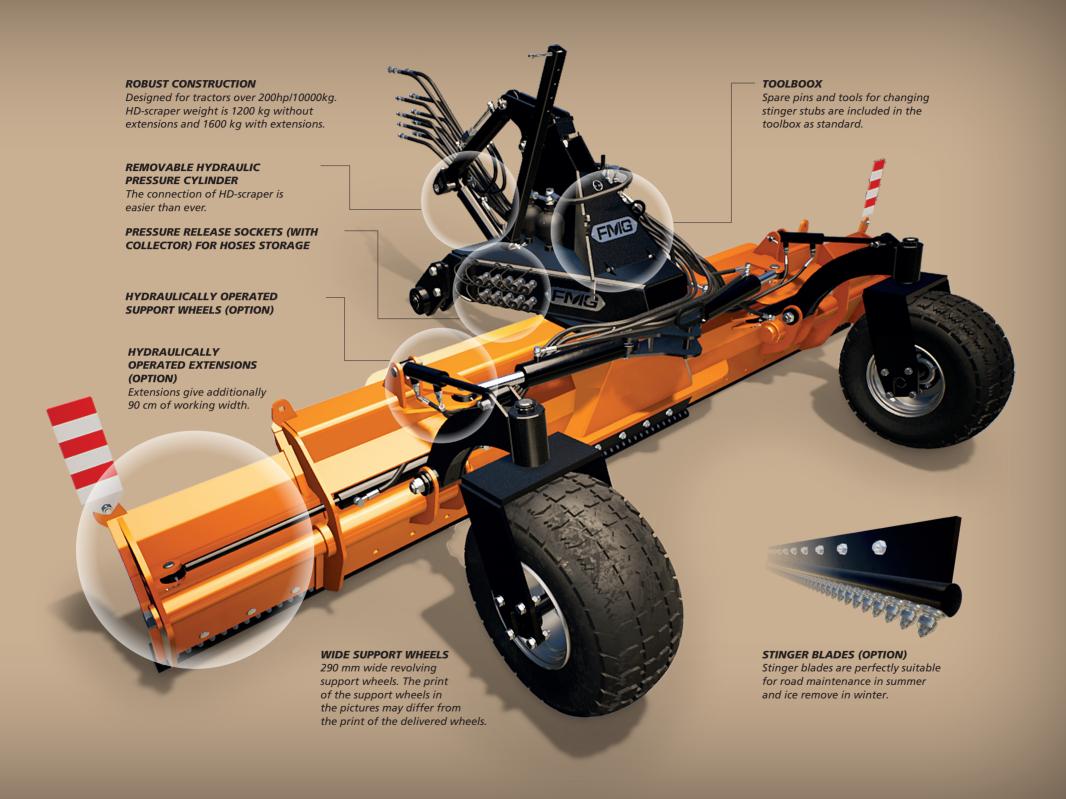







EQUIPMENT AND TECHNICAL INFORMATION







STANDARD EQUIPMENT

- even blade 3m
- support wheels (revolving)
- hydraulic top link
- hydraulic pressure cylinder
- hydraulic turning (+-27 degrees)
- toolbox
- tools for changing stinger stubs

OPTIONAL EQUIPMENT

- hydraulic extensions (left and right)
- hydraulic support wheels (right or/and left)
- perforated blade
- stinger blade
- toothed hard metal cutting edge
- electric valve 6/2 with external coupling and electric control (inc. control box and Hella Din power cord for control)

Model	Width, mm	Height, mm	Working width, mm	Ext. wing, mm	Turning angle, °	Weight, kg
RAP300HD - no extension wings	3040	640	2700 - 3000	-	+/- 27	1200
RAP300HD - with extension wings	3040	640	2700 - 3900	2 x 450	+/- 27	1600

Contact us

FMG - LLP Farm Machinery Group

Tel. +358 20 1984 020 Email sales@fmg.fi Web www.fmg.fi

© Copyright Farm Machinery Group 2024. Kaikki oikeudet muutoksiin pidätetään.